

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 823 331 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:

**28.11.2001 Bulletin 2001/48**

(21) Application number: **97900746.5**

(22) Date of filing: **22.01.1997**

(51) Int Cl.7: **B41M 5/30, B41M 5/38**

(86) International application number:  
**PCT/JP97/00124**

(87) International publication number:  
**WO 97/28968 (14.08.1997 Gazette 1997/35)**

### (54) **THERMAL TRANSFER INK AND THERMAL TRANSFER INKED RIBBON**

**THERMOÜBERTRAGUNGSTINTE UND THERMISCHES ÜBERTRAGUNGSFARBSTOFFBAND**

**ENCRE A TRANSFERT THERMIQUE ET RUBAN ENCREUR A TRANSFERT THERMIQUE**

(84) Designated Contracting States:  
**DE FR GB IT NL**

(30) Priority: **08.02.1996 JP 4665596**

(43) Date of publication of application:  
**11.02.1998 Bulletin 1998/07**

(73) Proprietor: **Sony Chemicals Corporation**  
**Tokyo 103-0022 (JP)**

(72) Inventors:

- **SHUTARA, Yoichi, Sony Chemicals Corp.**  
**Kanuma-shi, Tochigi 322 (JP)**
- **SEKIGUCHI, Morio, Sony Chemicals Corp.**  
**Kanuma-shi, Tochigi 322 (JP)**

- **FUJIMAKI, Satoshi, Sony Chemicals Corp.**  
**Kanuma-shi, Tochigi 322 (JP)**

(74) Representative: **Körber, Wolfhart, Dr. rer.nat.**  
**Patentanwälte**  
**Mitscherlich & Partner,**  
**Sonnenstrasse 33**  
**80331 München (DE)**

(56) References cited:

<b>EP-A- 0 414 225</b>	<b>JP-A- 3 009 885</b>
<b>JP-A- 3 239 589</b>	<b>JP-A- 5 131 754</b>
<b>JP-A- 8 238 846</b>	<b>JP-A- 63 001 593</b>
<b>US-A- 5 110 389</b>	

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 823 331 B1**

**Description**

Technical field:

- 5 **[0001]** The present invention relates to a thermal transfer ink useful for a thermal transfer recording process which employs a thermal head, etc., and a thermal transfer ink ribbon which employs such a thermal transfer ink.

Background art:

- 10 **[0002]** At present, thermal transfer recording processes which employ heating units such as thermal heads, etc. are widely practiced in recording devices such as printers as computer terminals, word processors, facsimile machines, copying machines, etc. Those thermal transfer recording processes are classified into a thermal transfer recording process which employs heat-resistive paper and a thermal transfer recording process which employs thermal transfer ink ribbon.

- 15 **[0003]** The thermal transfer recording process which employs thermal transfer ink ribbon is referred to as thermal fusion and transfer recording process. According to this process, an ink layer is disposed on a base in the shape of a tape, and a transfer medium (printing medium) such as paper is held in intimate contact with the ink layer. A thermal head is applied to the reverse side of the base to heat the base, fusing the ink layer with heat and transferring the ink to the transfer medium. Heretofore, the ink layer comprises a colorant, a filler, etc. which are rendered formable by a  
20 binding material (hereinafter referred to as a binder) that mainly comprises wax, and is deposited on the base to a thickness of several  $\mu\text{m}$ .

- [0004]** In recent years, transferred images that are printed using such a thermal transfer ink ribbon have been required to be highly sharp in appearance. Since sharper transferred images can be obtained as the ink layer has a greater ability to be separated sharply from the base, it has been attempted to add fine particles of a heat-setting resin such  
25 as silicone resin or the like to the ink layer of the thermal transfer ink ribbon whose binder main comprises wax for thereby improving the ability of the ink layer to be separated sharply from the base, and such attempts have proven somewhat effective (Japanese laid-open patent publication No. 3-239589).

- [0005]** However, with the thermal transfer ink ribbon whose binder main comprises wax, images transferred to a transfer medium by the thermal transfer process are poor in heat resistance and wear resistance, and hence have no  
30 sufficient durability.

- [0006]** It has been proposed to use a thermally fusible resin, i.e., a thermoplastic resin, instead of wax, as a main constituent of the binder. While the use of a thermoplastic resin is effective to improve the heat resistance and wear resistance of transferred images, however, the ability of the ink layer to be sharply transferred from the base is reduced. In a boundary between an area of the ink layer which has been heated by the thermal head and an area of the ink  
35 layer which has not been heated by the thermal head, the ink layer may not sharply be separated from the base, failing to produce a sharp transferred image.

- [0007]** In an effort to solve the above problem with respect to the ability of the ink layer to be sharply separated from the base, the inventors of the present invention have proposed a thermal transfer ink ribbon as disclosed in Japanese laid-open patent publication No. 5-286272.

- 40 **[0008]** The disclosed thermal transfer ink ribbon has an ink layer comprising a colorant, a thermoplastic resin, and particles of a fluorine-containing resin or a silicone resin, and allows the ink layer to be separated sharply to produce sharp transferred images while maintaining desired heat resistance and wear resistance thereof.

- [0009]** If the transfer medium constitutes a label, then images transferred using the above thermal transfer ink ribbon may be sharp or not sharp depending on the type of the label, and hence have no constant printing quality. There are  
45 various factors which make transferred images not sharp, and it has been desired to analyze the factors and establish measures to eliminate those factors.

- [0010]** JP-A-3009885 discloses a thermal transfer ink having a thermally fusible resin. Said thermal transfer ink contains fine resin particles consisting of polymethyl methacrylate.

- [0011]** US-A-5,110,389 discloses a thermofusible ink layer comprising a thermofusible material, a colouring agent and a filler wherein the difference between the refractive index of said filler and the refractive index of the thermofusible material of the ink layer being 0,15 or less.

- 50 **[0012]** JP-A-63001593 discloses a thermal transfer ink having a thermally fusible resin wherein said thermal transfer ink contains resin particles on the basis of polycarbonate, polyamide or polypropylene.

- 55 Disclosure of the invention:

**[0013]** The present invention attempts to alleviate the conventional shortcomings described above. It is a first object of the present invention to provide a thermal transfer ink ribbon which is capable of producing sharp transferred images.

**[0014]** A second object of the present invention is to provide a thermal transfer ink ribbon which will increase durability features such as heat resistance, wear resistance, etc. of transferred images.

**[0015]** A third object of the present invention is to provide a thermal transfer ink ribbon which has good ink transferability.

**[0016]** Generally, for printing a transfer medium with a thermal transfer ink ribbon, the thermal transfer ink ribbon and the transfer medium are brought into contact with each other, and the transfer medium is transported by an internal mechanism of a printer to transport the thermal transfer ink ribbon due to frictional engagement with the transfer medium. The inventors of the present invention have tried to find factors responsible for making transferred images not sharp with the thermal transfer ink ribbon disclosed in Japanese laid-open patent publication No. 5-286272, and found that when a transferred image is printed, the thermal transfer ink ribbon slips on the surface of the transfer medium and hence is not properly transported.

**[0017]** With the thermal transfer ink ribbon whose binder main comprises wax, the ink layer is soft and kept in intimate contact with a transfer medium which has large surface irregularities when an image is to be printed thereon. No problem has arisen about the ability of the thermal transfer ink ribbon to be transported with the transfer medium.

**[0018]** With the thermal transfer ink ribbon whose binder main comprises a thermally fusible resin, however, the ink layer is hard and is highly dependent on the surface irregularities of the transfer medium for the ability to be held in intimate contact with the transfer medium. If the transfer medium has large surface irregularities, therefore, the ability of the thermal transfer ink ribbon to be held in intimate contact with the transfer medium is insufficient, and as a result, friction forces developed between the thermal transfer ink ribbon and the transfer medium are small.

**[0019]** The inventor has found that the thermal transfer ink ribbon whose ink layer comprises a colorant, a thermoplastic resin, and particles of a fluorine-containing resin or a silicone resin tends to slip against the transfer medium depending on the type of the transfer medium because the fine particles which produce small frictional forces are added to the ink layer which produces small frictional forces, reducing the coefficient of friction of the surface of the ink layer to a level smaller than would be if the fine particles were not added.

**[0020]** Therefore, if the main constituent of the binder of the thermal transfer ink is a thermally fusible resin, then fine particles of low slipperiness may be added to the ink layer to increase the coefficient of friction of the surface of the ink layer, thereby making the ink layer resistant to slippage. It is expected that the fine particles of low slipperiness will maintain a good ability of the ink layer to be separated sharply from the base when it is transferred to the transfer medium.

**[0021]** The present invention has been devised on the basis of the above findings in order to solve the above problems. According to an invention defined in claim 1, there is provided a thermal transfer ink including a binding material having a thermally fusible resin as a main constituent, characterized in that the thermal transfer ink contains fine particles of low slipperiness comprising a heat-resistant material which is not softened at a temperature at which said binding material is softened, wherein said fine particles of low slipperiness comprise particles of one or more of a condensation resin of benzoguanamine and formaldehyde, a condensation resin of melamine and formaldehyde, a condensation resin of benzoguanamine, melamine, and formaldehyde.

**[0022]** The fine particles of low slipperiness according to the invention defined in claim 1, according to an invention defined in claim 2, may be contained in the thermal transfer ink in an amount exceeding 10 % by weight and less than 60 % by weight.

**[0023]** According to an invention defined in claim 3, the fine particles of low slipperiness should preferably be contained in an amount ranging from 20 % by weight to 50 % by weight.

**[0024]** In the invention defined in any of claims 1 through 3, according to an invention defined in claim 4, the fine particles of low slipperiness may have an average diameter ranging from 0.3  $\mu\text{m}$  to 3.0  $\mu\text{m}$ .

**[0025]** According to an invention defined in claim 5, a thermal transfer ink ribbon comprises a thermally fusible ink layer disposed on a base, the thermally fusible ink layer comprising the thermal transfer ink according to any one of claims 1 through 4.

**[0026]** With the arrangement of the present invention, the fine particles of low slipperiness contained in the ink layer are not softened at the temperature at which the thermally fusible material, which is a main constituent of the binder (binding material), is softened. Therefore, when the ink layer is thermally transferred, the fine particles are thermally stable and not softened, thereby improving the ability of the ink layer to be separated sharply from the base. Since the surfaces of the fine particles of low slipperiness have a large coefficient of friction (low slipperiness), the ink layer and a transfer medium do not slip against each other, thus allowing images of high printing quality to be transferred from the ink layer to the transfer medium.

**[0027]** The fine particles of low slipperiness may comprise resin particles other than particles of a fluorine-containing resin or a silicone resin, e.g., particles of an acrylic resin, particles of a metacrylic resin, and particles of an epoxy resin, in addition to condensed particles produced by a condensation polymerization reaction, i.e. particles of a condensation resin of benzoguanamine and formaldehyde, a condensation resin of melamine and formaldehyde, a condensation resin of benzoguanamine, melamine, and formaldehyde.

**[0028]** It is possible to use, among whose particles, particles of a condensation resin which is stable at the temperature at which the thermally fusible material is softened.

**[0029]** If the particles were contained in the ink layer in an amount of 10 % by weight or lower, then the particles would cause increased slippage, and if the particles were contained in the ink layer in an amount of 60 % by weight or higher, then the thermal sensitivity of the thermal transfer ink would be lowered, imposing an increased load on a thermal head. Therefore, it is necessary that the particles be contained in an amount exceeding 10 % by weight and less than 60 % by weight. It is particularly preferable that the particles be contained in an amount ranging from 20 % by weight to 50 % by weight.

**[0030]** Preferably, the average diameter of the fine particles of low slipperiness should not too large with respect to the thickness of the ink layer. Practically, the thickness of the ink layer is usually in the range of from 0.3  $\mu\text{m}$  to 10.0  $\mu\text{m}$ . The average diameter of the fine particles of low slipperiness is preferably smaller than the thickness of the ink layer which contains the fine particles of low slipperiness, and more preferably should range from 0.3  $\mu\text{m}$  to 3.0  $\mu\text{m}$ .

**[0031]** The thermally fusible resin contained as a main constituent of the binder of the thermal transfer ink has a melting point of 150°C or lower, preferably 120°C or lower, and more preferably ranging from 100°C to 120°C. Specifically, the thermally fusible resin may comprise one or more of polyester, polyamide, acrylic resin, vinyl chloride, EEA (ethylene acrylate copolymer), EVA (ethylene-vinyl acetate copolymer), terpene, petroleum resin, SIS (styrene-isoprene-styrene copolymer), SBS (styrene-butadiene-styrene copolymer), etc. If these thermally fusible resins are used as a main constituent of the binder, then transferred images will have better durability features such as heat resistance, wear resistance, etc. than would be if wax were used, and will be sharp and have high printing quality in combination with the ability of the ink layer to be separated sharply from the base.

**[0032]** A colorant contained in the thermal transfer ink may be any of pigments and dyes which have heretofore been used for thermal fusion and transfer recording processes. For example, the colorant may comprise one or more of carbon black, fast yellow G, disazoyellow AAA, brilliant carmine 6B, phthalocyanine blue, titanium oxide, bronze, aluminum, etc.

**[0033]** The thermal transfer ink may also comprise other constituents including wax such as carnauba wax, candelilla wax, beeswax, paraffin wax, etc., a plasticizer, a dispersant, etc.

Brief description of the drawings:

**[0034]** Fig. 1 is a view showing by way of example a thermal transfer ink ribbon according to the present invention; and Fig. 2 is a view illustrative of a measuring method.

Best mode for carrying out the invention:

**[0035]** A thermal transfer ink ribbon according to the present invention is designated by the reference numeral 1 in FIG. 1. The thermal transfer ink ribbon 1 comprises a peel-off layer 12 and a thermally fusible ink layer 13 successively disposed in the order named on a surface of a sheet-like base 11. When a transfer medium such as a recording sheet of paper is held in intimate contact with the thermally fusible ink layer 13 and the thermally fusible ink layer 13 is fused with heat by a thermal head held in intimate contact with the reverse side of the ink ribbon 1, the thermally fusible ink is transferred uniformly to the transfer medium with low energy because of the peel-off layer 12, forming a transferred image on the transfer medium.

**[0036]** Since a protective layer 14 is mounted on the reverse side of the base 11, the thermal head held in intimate contact with the protective layer 14 does not stick to the thermal transfer ink ribbon 1, allowing the thermal transfer ink ribbon 1 to be transported smoothly.

**[0037]** The base 11 is made of polyester film, but may be made of polyimide film, capacitor paper, or the like. The peel-off layer 12 has a main constituent of wax such as carnauba wax, candelilla wax, or the like, and has a melting point ranging from 50°C to 100°C. The peel-off layer 12 can easily be peeled off when heated. The protective layer 14 is made of a silicone resin, but may be made of a highly heat-resistant resin such as a fluororesin, a nitrocellulose resin, or the like.

**[0038]** Preferably, the base 11 has a thickness ranging from 3.0 to 10.0  $\mu\text{m}$ , the peel-off layer 12 has a thickness ranging from 0.1 to 3.0  $\mu\text{m}$ , the thermally fusible ink layer 13 has a thickness ranging from 0.3 to 10.0  $\mu\text{m}$ , and the protective layer 14 has a thickness ranging from 0.05 to 1.00  $\mu\text{m}$ .

**[0039]** Examples of the present invention will hereinafter be described in specific detail below.

<Inventive Example 1>

**[0040]** 3 % by weight of Epostar S6 (particles of a condensation resin of melamine and formaldehyde manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 0.6  $\mu\text{m}$ ), 6 % by weight of carbon black, 21

% by weight of Eliter UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink.

[0041] Then, a polyester film having a thickness of 5.0  $\mu\text{m}$  was used as a base 11, and a protective layer 14 made of an acrylic-silicone resin was deposited on the reverse side of the base 11. A peel-off layer 12 made of 90 % by weight of ester wax and 10 % by weight of a copolymer of ethylene and vinyl acetate was deposited on the base 11, and then coated with the above thermal transfer ink, which was dried into a thermally fusible ink layer 13 having a thickness of 2.0  $\mu\text{m}$ , thereby producing a thermal transfer ink ribbon 1.

[0042] A polyester label (50 WH manufactured by Lintec K.K.) was printed with the produced thermal transfer ink ribbon 1 and a bar-code printer (BC-8mkII manufactured by Autonics K.K.), and then evaluated for thermal sensitivity, printing quality, and an amount of ribbon slippage.

[0043] As shown in Fig. 2, the bar-code printer comprises a thermal head 22 and a platen 23 with the thermal transfer ink ribbon 1 and a transfer medium 24 being sandwiched therebetween. The platen 23 is rotated to transport the transfer medium 24 for thereby printing the transfer medium 24 and feeding the thermal transfer ink ribbon 1. If there is slippage occurring between the thermal transfer ink ribbon 1 and the transfer medium 24, then the transfer medium 24 travels a greater distance than the thermal transfer ink ribbon 1.

[0044] The thermal head 22 is arranged to print 8 dots in an interval of 1 mm.

<Inventive Example 2>

[0045] 6 % by weight of Epostar S6 (particles of a condensation resin of melamine and formaldehyde manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 0.6  $\mu\text{m}$ ), 6 % by weight of carbon black, 18 % by weight of Eliter UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

<Inventive Example 3>

[0046] 9 % by weight of Epostar S6 (particles of a condensation resin of melamine and formaldehyde manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 0.6  $\mu\text{m}$ ), 6 % by weight of carbon black, 15 % by weight of Eliter UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

<Inventive Example 4>

[0047] 12 % by weight of Epostar S6 (particles of a condensation resin of melamine and formaldehyde manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 0.6  $\mu\text{m}$ ), 6 % by weight of carbon black, 12 % by weight of Eliter UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

<Inventive Example 5>

[0048] 15 % by weight of Epostar S6 (particles of a condensation resin of melamine and formaldehyde manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 0.6  $\mu\text{m}$ ), 6 % by weight of carbon black, 9 % by weight of Eliter UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

<Inventive Example 6>

[0049] 18 % by weight of Epostar S6 (particles of a condensation resin of melamine and formaldehyde manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 0.6  $\mu\text{m}$ ), 6 % by weight of carbon black, 6 % by weight of Eliter UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

## &lt;Inventive Example 7&gt;

**[0050]** 6 % by weight of Epostar S (particles of a condensation resin of melamine and formaldehyde manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 0.3  $\mu\text{m}$ ), 6 % by weight of carbon black, 18 % by weight of Eliter UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

## &lt;Inventive Example 8&gt;

**[0051]** 6 % by weight of Epostar S12 (particles of a condensation resin of melamine and formaldehyde manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 1.2  $\mu\text{m}$ ), 6 % by weight of carbon black, 18 % by weight of Eliter UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

## &lt;Inventive Example 9&gt;

**[0052]** 6 % by weight of Epostar MS (particles of a condensation resin of benzoguanamine and formaldehyde manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 2.0  $\mu\text{m}$ ), 6 % by weight of carbon black, 18 % by weight of Eliter UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

## &lt;Inventive Example 10&gt;

**[0053]** 6 % by weight of Epostar M30 (particles of a condensation resin of benzoguanamine, melamine, and formaldehyde manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 3.0  $\mu\text{m}$ ), 6 % by weight of carbon black, 18 % by weight of Eliter UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

## &lt;Non-Inventive Example &gt;

**[0054]** 6 % by weight of Epostar MA1001 (particles of a polymethyl methacrylate resin manufactured by Kabushiki Kaisha Nippon Shokubai and having an average diameter of 1 - 2  $\mu\text{m}$ ), 6 % by weight of carbon black, 18 % by weight of Elitel UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

## &lt;Comparative Example 1&gt;

**[0055]** 6 % by weight of carbon black, 24 % by weight of Elitel UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

## &lt;Comparative Example 2&gt;

**[0056]** 6 % by weight of KTL-8 (particles of tetrafluoroethylene manufactured by Kabushiki Kaisha Kitamura and having an average diameter of 3.0  $\mu\text{m}$ ), 6 % by weight of carbon black, 18 % by weight of Elitel UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

## &lt;Comparative Example 3&gt;

**[0057]** 6 % by weight of Tospal (particles of a silicone resin manufactured by Toshiba Silicone Kabushiki Kaisha and having an average diameter of 0.8  $\mu\text{m}$ ), 6 % by weight of carbon black, 18 % by weight of Elitel UE3380 (polyester resin manufactured by Unitika Kabushiki Kaisha), and 70 % by weight of MEK were mixed, thereby preparing a thermal

## EP 0 823 331 B1

transfer ink. A thermal transfer ink ribbon 1 was produced and evaluated in the same manner as with Example 1.

<Results of evaluation>

5 **[0058]** Results of evaluation are given in Table 1 below.

10

15

20

25

30

35

40

45

50

55

Table 1 :

Results of evaluation of Inventive and Comparative Examples									
	Composition of fine particles	Particle diameter ( $\mu$ m)	Content (%)	Printed result at 20 mJ/mm <sup>2</sup>	Optimum-heat energy (mJ/mm <sup>2</sup> )	Tail length ( $\mu$ m)	Printing quality	Amount of slippage (mm)	Slippage evaluation
In.Ex. 1	1 A	0.6	10	○	13	37	×	13.3	×
In.Ex. 2	A	0.6	20	○	14	0	○	1.3	○
In.Ex. 3	A	0.6	30	○	15	5	○	2.0	○
In.Ex. 4	A	0.6	40	○	17	7	○	1.1	○
In.Ex. 5	A	0.6	50	○	19	5	○	0.5	○
In.Ex. 6	A	0.6	60	×	23	3	○	1.7	○
In.Ex. 7	A	1.3	20	○	14	8	○	2.5	△
In.Ex. 8	A	1.2	20	○	14	4	○	0.7	○
In.Ex. 9	B	2.0	20	○	15	4	○	0.7	○
In.Ex. 10	C	3.0	20	○	17	4	○	0.7	○
Non-In.Ex.	D	1.5	20	○	15	4	○	4.0	△
Co.Ex. 1	Not added	-	0	○	13	32	○	16.3	×
Co.Ex. 2	E	3.0	20	○	16	4	○	30.0	×
Co.Ex. 3	F	0.8	20	○	14	3	○	21.5	×
A condensation resin of benzoguanamine and formaldehyde B condensation resin of melamine and formaldehyde C condensation resin of benzoguanamine, melamine, and formaldehyde D ..... polymethyl methacrylate resin (A-C : fine particles of low slipperiness) E ..... tetrafluoroethylene F ..... silicone resin (E, F : conventional fine particles)									



[0059] The printed result at 20 mj/mm<sup>2</sup> was achieved when the thermal head 22 was arranged to generate heat with an energy of 20 mj/mm<sup>2</sup>. It was evaluated as ○ when a void (white dot) was not visually observed and as × when visually observed.

[0060] However, even when no void was observed, images printed with the energy of 20 mj/mm<sup>2</sup> in those examples where the optimum heat energy was too low were solid black due to the excessive energy, and had poor printing quality.

[0061] In Table 1, the optimum heat energy was represented by heat energy converted from settings of the thermal head 22 when printed results of best printing quality were obtained. Generally, if the optimum heat energy is too high, then the thermal head will be damaged. Therefore, it has been considered that the optimum heat energy should preferably be 20 mj/mm<sup>2</sup> or less.

[0062] The tail length indicates whether the ability of the thermally fusible ink layer to be separated from the base is good or not. As the tail length is smaller, transferred images are sharper and have better printing quality. In Table 1, those examples whose tail length was 10 μm or less were evaluated as ○ because of good printing quality, and those examples whose tail length was less than 10 μm were evaluated as × because of poor printing quality.

[0063] The amount of slippage was represented by a distance which the thermal transfer ink ribbon 1 failed to travel when the distance which the transfer medium 24 traveled was 10 cm. The slippage evaluation was marked ○ for those examples where the difference between the distances which the thermal transfer ink ribbon 1 and the transfer medium 24 traveled was less than 2.0 %, Δ for those examples where the difference between the distances which the thermal transfer ink ribbon 1 and the transfer medium 24 traveled was 2.0 % or more and less than 5.0 %, and × for those examples where the difference between the distances which the thermal transfer ink ribbon 1 and the transfer medium 24 traveled was 5.0 % or more. In the Inventive and Comparative Examples, the transfer medium 24 comprised the same polyester label.

[0064] As can be seen from the results shown in Table 1, the thermal transfer ink ribbons (Inventive Examples 1 ~ 10) which employed the thermal transfer ink according to the present invention used a thermally fusible resin as a main constituent of the binder. Therefore, they provide excellent durability features such as heat resistance, wear resistance, etc. for the printed documents. Because they contained fine particles of low slipperiness, the ink layer was separated sharply from the base when transferred onto the transfer medium, producing sharp transferred images of high printing quality.

[0065] In the above embodiment, the fine particles of low slipperiness are made of a selected one of a condensation resin of benzoguanamine and formaldehyde, a condensation resin of melamine and formaldehyde, and a condensation resin of benzoguanamine, melamine, and formaldehyde, and are contained in the thermally fusible ink layer. However, the fine particles of low slipperiness may be made of two or more of those condensation resins, and may be contained in one thermally fusible ink layer.

[0066] The fine particles of low slipperiness should be spherical in shape, but may be of various shapes including a scaly shape, an irregular shape, etc.

Industrial applicability:

[0067] As described above, since the main constituent of a thermal transfer ink according to the present invention is a thermoplastic resin, transferred images produced when the thermal transfer ink and a thermal transfer ink ribbon which employs the thermal transfer ink have increased durability features such as heat resistance, wear resistance, etc. Therefore, the thermal transfer ink and the thermal transfer ink ribbon can be used in a wide variety of applications.

[0068] Since the fine particles of low slipperiness are employed, the ink layer has a good ability to be separated sharply from the base, transferred images have high printing quality, and no slippage occurs when images are transferred. Since the transferred images are sharp, the thermal transfer ink and the thermal transfer ink ribbon can be used in applications where precision printing is required, e.g., bar-code printing.

[0069] Inasmuch as the thermal transfer ink and the thermal transfer ink ribbon have good thermal transferability, they can be used conveniently and can find a wide variety of applications including printers, word processors, and various devices.

Description of reference numerals

[0070]

1...thermal transfer ink ribbon

11...base

12...peel-off layer

13...thermally fusible ink layer

14...protective layer

22...thermal head  
23...platten  
24...transfer medium

5

## Claims

1. A thermal transfer ink including  
a binding material having a thermally fusible resin as a main constituent, **characterized in that** the thermal transfer ink contains fine particles of low slipperiness comprising a heat-resistant material which is not softened at a temperature at which said binding material is softened, wherein said fine particles of low slipperiness comprise particles of one or more of a condensation resin of benzoguanamine and formaldehyde, a condensation resin of melamine and formaldehyde, a condensation resin of benzoguanamine, melamine, and formaldehyde.
2. A thermal transfer ink according to claim 1, wherein said fine particles of low slipperiness are contained in the thermal transfer ink in an amount exceeding 10 % by weight and less than 60 % by weight.
3. A thermal transfer ink according to claim 1, wherein said fine particles of low slipperiness are contained in an amount ranging from 20 % by weight to 50 % by weight.
4. A thermal transfer ink according to any one of claims 1 through 3, wherein said fine particles of low slipperiness have an average diameter ranging from 0.3µm to 3.0µm.
5. A thermal transfer ink ribbon comprising a thermal transfer ink according to any one of claims 1 through 4 disposed as a thermally fusible ink layer on a base.

## Patentansprüche

1. Thermoübertragungstinte, die ein Bindemittel, das ein thermisch schmelzbares Harz als einen Hauptbestandteil aufweist, einschließt, **dadurch gekennzeichnet, dass** die Thermoübertragungstinte feine Partikel geringer Schlüpfrigkeit enthält, die ein wärmebeständiges Material, das bei einer Temperatur bei der das Bindemittel erweicht nicht erweicht, umfasst, wobei die feinen Partikel geringer Schlüpfrigkeit Partikel aus einem Kondensationsharz aus Benzoguanamin und Formaldehyd, aus einem Kondensationsharz aus Melamin und Formaldehyd und / oder aus einem Kondensationsharz aus Benzoguanamin, Melamin und Formaldehyd umfassen.
2. Thermoübertragungstinte gemäß Anspruch 1, worin die feinen Partikel geringer Schlüpfrigkeit in einem Menge in der Thermoübertragungstinte enthalten sind, die 10 Gew.-% übersteigt und weniger als 60 Gew.-% beträgt.
3. Thermoübertragungstinte gemäß Anspruch 1, worin die feinen Partikel geringer Schlüpfrigkeit in einem Menge im Bereich von 20 Gew.-% bis 50 Gew.-% enthalten sind.
4. Thermoübertragungstinte gemäß einem der Ansprüche 1 bis 3, worin die feinen Partikel geringer Schlüpfrigkeit einen mittleren Durchmesser im Bereich von 0,3µm bis 3,0µm aufweisen.
5. Thermoübertragungstintenband, das eine Thermoübertragungstinte gemäß einem der Ansprüche 1 bis 4 umfasst, die als eine thermisch schmelzbare Tintensicht auf einer Basis angeordnet ist.


## Revendications

1. Encre à transfert thermique incluant un matériau liant, dont le composant principal est une résine thermofusible, dont la caractéristique est de contenir des particules fines de faible glissance comprenant un matériau résistant à la chaleur qui n'est pas ramolli à la température à laquelle le matériau liant est ramolli, ces particules fines de faible glissance comprenant des particules d'une ou de plusieurs résines de condensation de benzoguanamine et de formaldéhyde, de condensation de mélamine et de formaldéhyde, de condensation de benzoguanamine, mélamine et formaldéhyde.

## EP 0 823 331 B1

2. Encre à transfert thermique selon la revendication 1, dans laquelle la quantité de particules fines de faible glissance contenues dans l'encre à transfert thermique est supérieure à 10 % du poids et inférieure à 60 % du poids.
3. Encre à transfert thermique selon la revendication 1, dans laquelle la quantité de particules fines de faible glissance est comprise entre 20 % et 50 % du poids.
4. Encre à transfert thermique selon l'une des revendications 1 à 3, dans laquelle le diamètre moyen des particules fines de faible glissance est compris entre 0,3  $\mu\text{m}$  et 3,0  $\mu\text{m}$ .
5. Ruban encreur à transfert thermique contenant une encre à transfert thermique selon l'une quelconque des revendications 1 à 4, placé comme film d'encre à transfert thermique sur une base.

*Fig. 1*

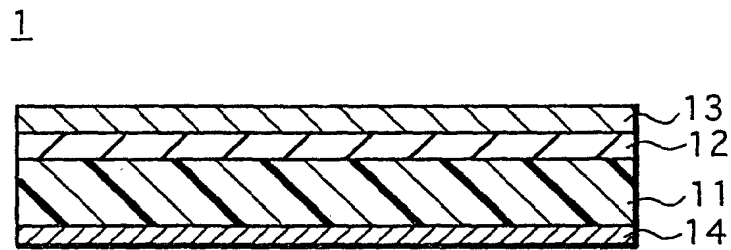

*Fig. 2*

